



Shenzhen XingKeChuang Technology Co., Ltd.



MCU

:

	XKC-Y26A-V	XKC-Y26A-PNP	XKC-Y26A-NPN
Vin	DC 5-24V	DC 5-12V) DC 24V	DC 5-12V DC 24V
	≤5mA		
	Vin		
	0V		
	≤100mA		
	500mS		
	-20~105		
	5mm 10mm		
	±1.5mm		
	5%~100%		
	PC V0		
	IP67		
	CE		
	ROHS-2.0		




Shenzhen XingKeChuang Technology Co., Ltd.

1 5mm 10mm 11mm
2 60°


:

Y26A

1
2

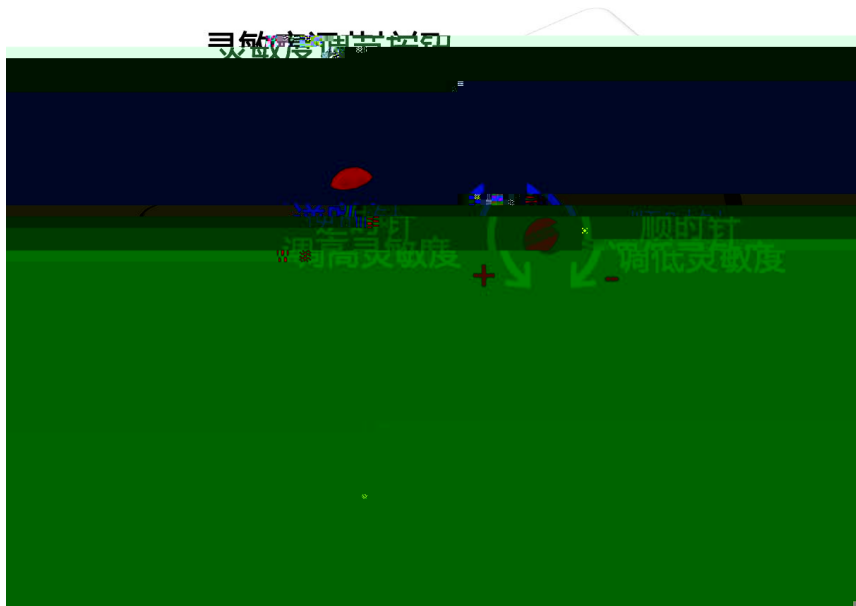

:

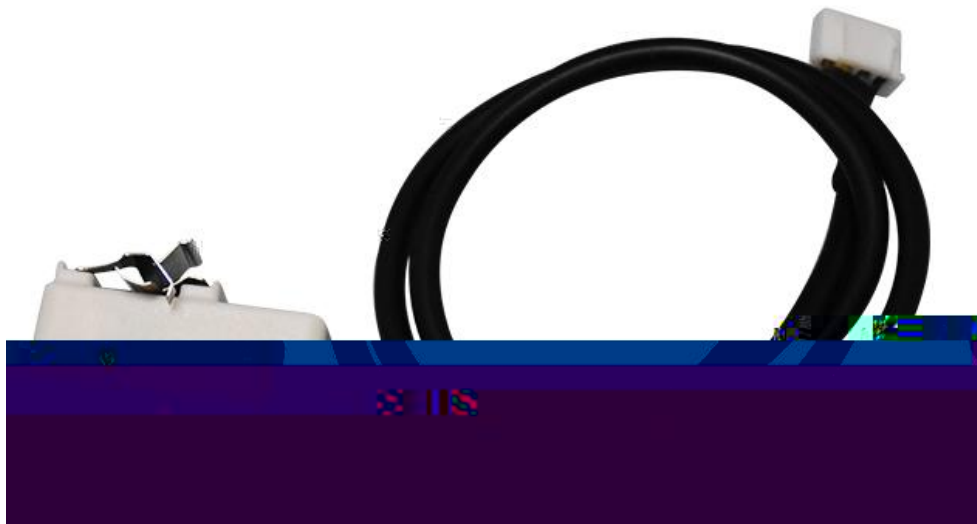



Shenzhen XingKeChuang Technology Co., Ltd.



Shenzhen XingKeChuang Technology Co., Ltd.

XKC-Y26A-PNP (开关量型) 输出原理及接线方法



PNP ($\leq 100\text{mA}$)

1.

2. (0V)



Shenzhen XingKeChuang Technology Co., Ltd.

aS

10 aS<

<30mPaS

>30mPaS

—

3.

4.

5.

:

•

()

1.

•

•

9

,

,

" .
;



Shenzhen XingKeChuang Te