






Shenzhen XingKeChuang Technology Co., Ltd.

1.NPN , i 4 5 n v p ~ Y g

XKC-001A-T-NPN(开关量型)原理及接线方法

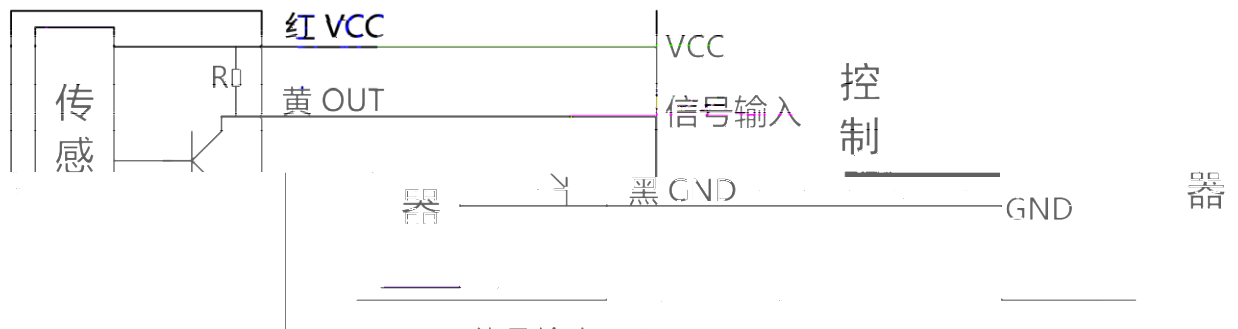



Shenzhen XingKeChuang Technology Co., Ltd.





1. $\mathcal{N} \cup \{ \dot{\omega} \in \mathcal{T} \mid \mathcal{P} \ddot{A} \times \dot{\omega} \ddot{\eta} (\text{ " } \dot{\imath} \mathcal{I} \times \mathcal{I} \mathcal{J} \mathcal{P} \ddot{e} \Phi, \times \mathcal{I} \text{ " } \ddot{A} \mathcal{H} \mathfrak{b} \ddot{\omega} \dot{\gamma} \mathcal{H}, \text{ " } \Psi) . \bar{G} \text{ " } \mathcal{H} \acute{o} \quad d \ddot{A} \times$
 $\mathcal{L} \text{ " } \dot{\eta} \sim \mathcal{I} \mathcal{A} \mathcal{Y} \mathcal{Z} \text{ " } \Psi, \ddot{e} \Phi \mathcal{I} \dot{\imath} .$
2. $\mathcal{N} \cup \mathcal{Y} \mathcal{Z} \mathfrak{H} \mathfrak{K} \times \mathcal{I} \blacksquare \mathcal{I} \mathfrak{m} \supset \mathcal{N}, \mathcal{K} \text{ " } \mathcal{P} \mathcal{I} \mathfrak{m} \mathcal{Z} \vdash \mathcal{Y} (\mathcal{Y} \mathcal{Z} \vdash \mathcal{Y}) \text{ " } \boxed{\text{ " } \ddot{e} \Phi \text{ " } \mathfrak{K} \omega, \text{ " } \mathfrak{K} \omega, \text{ " } \mathcal{Y} \mathcal{Z} \text{ " } \mathcal{I} \text{ " } \mathfrak{z} ; \mathcal{P} \mathcal{A} \mathfrak{r} \mathcal{H} \mathcal{Y} \mathcal{Z} \text{ " } \mathcal{A} \acute{o} \quad \mathcal{J} \quad \dot{\omega} \mathcal{I} \text{ " } \vdash \mathcal{Y}, \quad d \quad \mathcal{U} \ddot{A} .$
3. $\bar{G} \text{ " } \mathcal{H} \mathcal{Z} \quad d \mathcal{P} \mathfrak{a} \mathfrak{n} \parallel \dot{\gamma} \quad \boxed{\text{ " } \mathcal{Y} \text{ " } \mathcal{A} \mathcal{T} \ddot{A} (\mathfrak{t} \mathfrak{K} \parallel \dot{\gamma} \mathfrak{a} \mathfrak{n} \text{ " } \mathcal{E} \mathfrak{z} \mathfrak{z} \mathcal{Y} \mathcal{Z} \vdash \mathcal{Y}, \mathfrak{h} \quad \mathcal{Y} \mathcal{Z} \mathfrak{H} \quad \mathcal{T} \ddot{A}) , \quad d$
 $\mathcal{U} \ddot{A} .$



