



型号: XKC-003K4






XKC-003K4

1. : ,





	DC5-12V
	<200uA
	(3.3V/ 0V) /NPN/ (/) / 2A LED
	L /H ()
	5S (5-300S)
	1S
	32mm*24mm
	52L*36W*23H mm (), 2.5
	≈ 28 cm
	<110
	7
	-20~85
	:23mm()

序号	型号	输出信号
1	XKC-003K4-V	(3.3V/ 0V) <3mA
2	XKC-003K4-N	NPN () <300mA
3	XKC-003K4-M	() 3A
4	XKC-003K4-MC	() 3A
5	XKC-003K4-LED2A	LED 2A




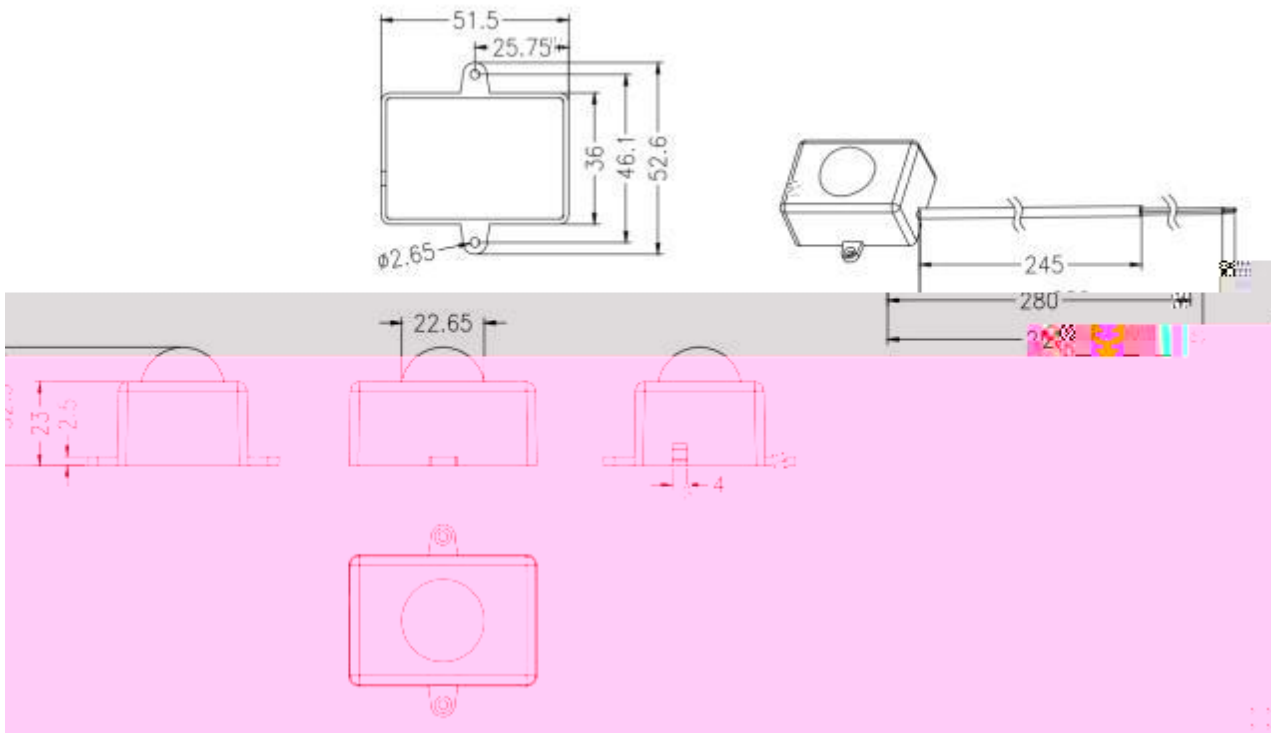


2. XKC-003K4-LED2A

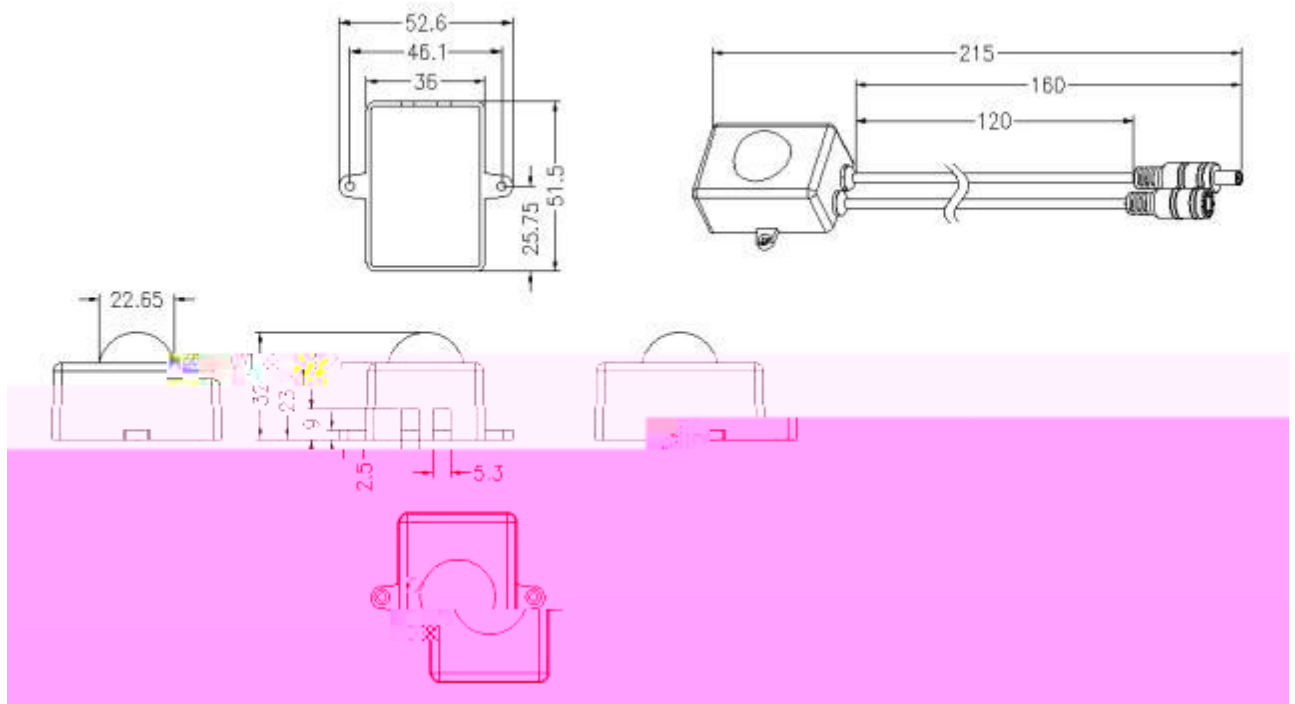


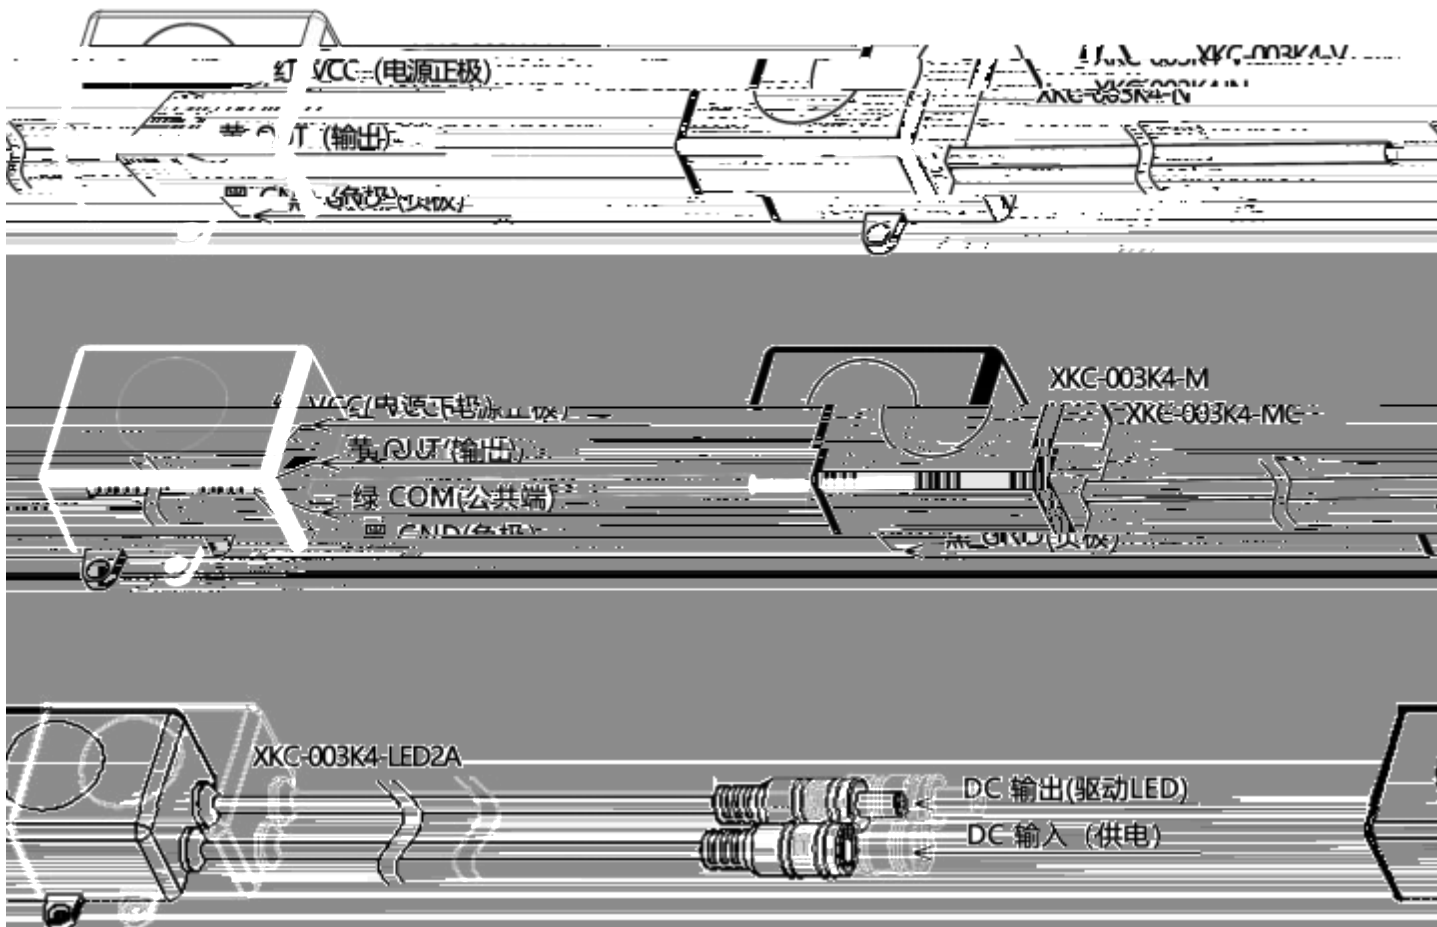

, (3); (7);
, (5S); (300S);

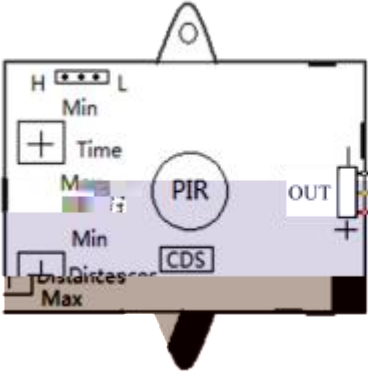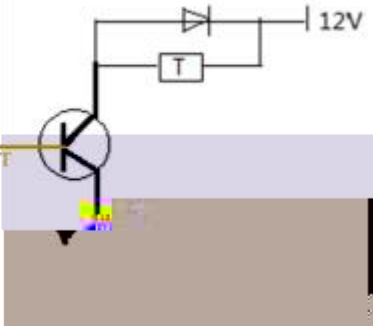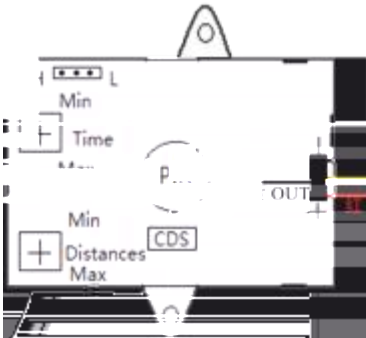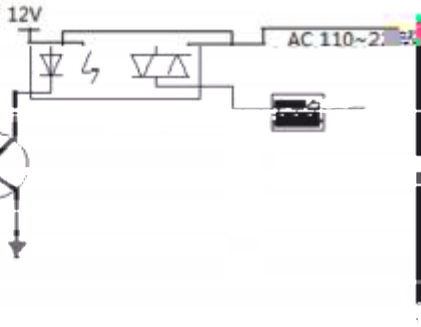1.		1. ; 2.OUT ; 3. ; 4.L ; H ; 5.CDS ; 6.Time ; 7.Distances
2.	 	
3.	 	

()

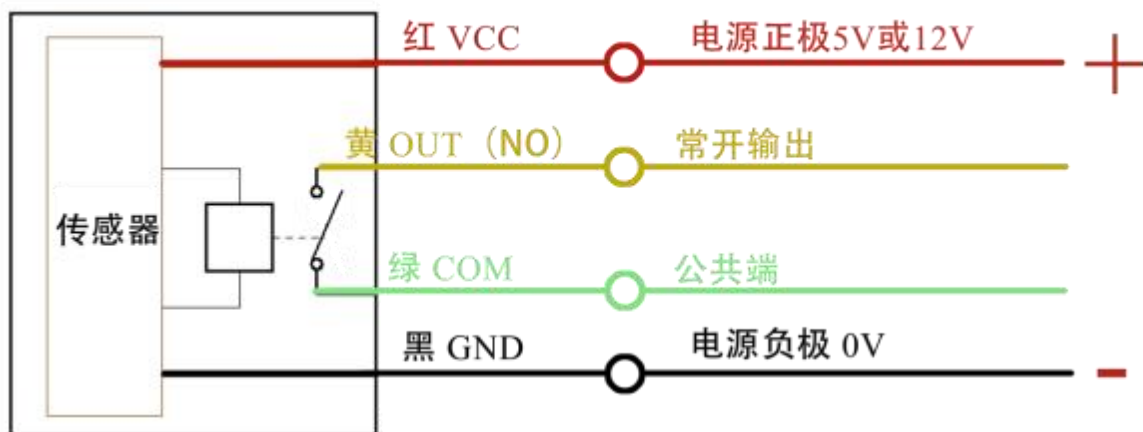



科技有限公司

Shenzhen XingKeChuang Technology Co., Ltd.

2.

3.

()

()

()

, () , (

),

()

()

/ : , 12 DOA ,

7

(ô

(} • D

Ö

VEDE. D
D VE 8

E

le.08K

Сп-VE
Y 0